
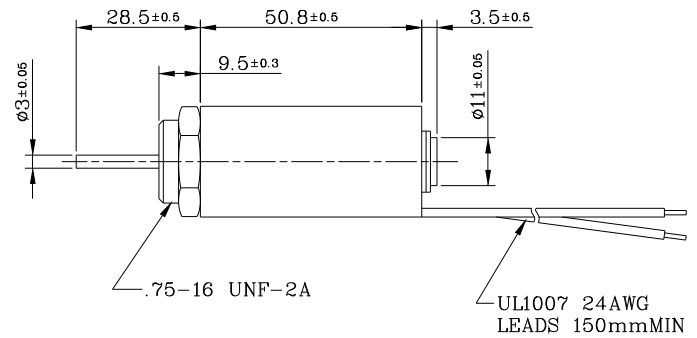



# MTT-2551H Tubular Solenoids

Plunger Weight  
Total Weight

可動鐵心重量: 37g  
總重量: 174g


Shown Energized 通電狀態  
UNIT 單位:mm

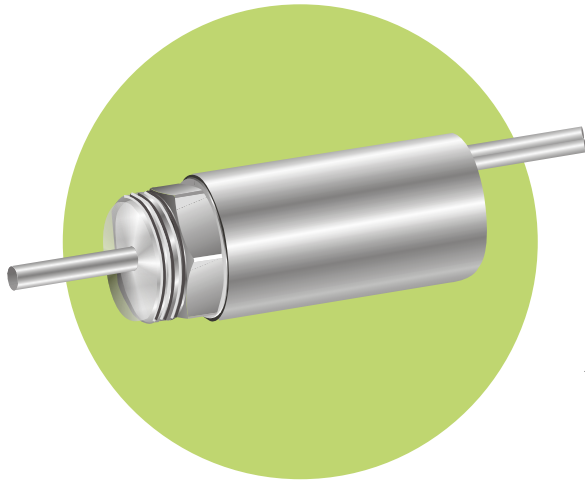

## COIL DATA線圈資料

| $\text{Duty Cycle (\%)} = \frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$ <p>作動週期 (%) = <math>\frac{\text{On時間}}{\text{ON時間} + \text{OFF時間}} \times 100\%</math></p> |                            |           | Continuous(100%)<br>連續(100%) | Or less(50%)<br>間斷(50%) | Or less(25%)<br>間斷(25%) | Or less(10%)<br>間斷(10%) |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------|------------------------------|-------------------------|-------------------------|-------------------------|
| MAX. "on" time in seconds<br>最大 ON 時間 (秒)                                                                                                                                                        |                            |           | ∞                            | 360                     | 32                      | 8                       |
| Watts at 20°C<br>瓦特數 (w) (在20°C)                                                                                                                                                                 |                            |           | 10                           | 20                      | 40                      | 100                     |
| Ampere-turns at 20°C<br>At值 (在20°C)                                                                                                                                                              |                            |           | 1090                         | 1541                    | 2180                    | 3447                    |
| Type No.                                                                                                                                                                                         | Resistance(20°C)<br>Ω ±10% | No. Turns | Volts DC<br>(電壓)             |                         |                         |                         |
| 型號                                                                                                                                                                                               | 阻值(Ω)±10%                  | 繞線圈數      |                              |                         |                         |                         |
| MTT-2551HAA                                                                                                                                                                                      | 3.6                        | 654       | 6                            | 8.5                     | 12                      | 19                      |
|                                                                                                                                                                                                  | 14.4                       | 1309      | 12                           | 17                      | 24                      | 38                      |
|                                                                                                                                                                                                  | 57.6                       | 2614      | 24                           | 34                      | 48                      | 76                      |
|                                                                                                                                                                                                  | 230.4                      | 5240      | 48                           | 68                      | 96                      | 152                     |

行程 / 吸引力  
STROKE Vs FORCE

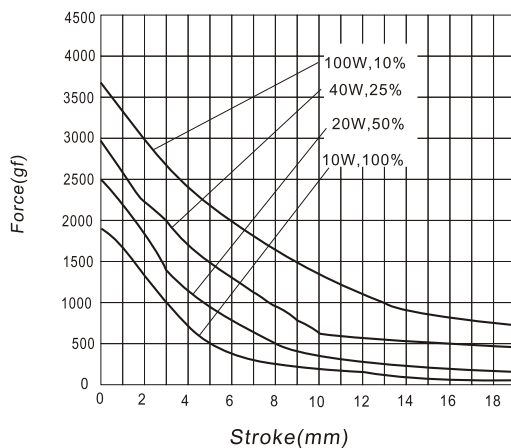

安-匝 / 吸引力  
AMPERE-TURNS Vs FORCE

