



MTT-3034HL Push-Pull Solenoids

Plunger Weight
Total Weight

可動鐵心重量: 35g
總重量: 152g

Shown Energized
UNIT


通電狀態
單位:mm

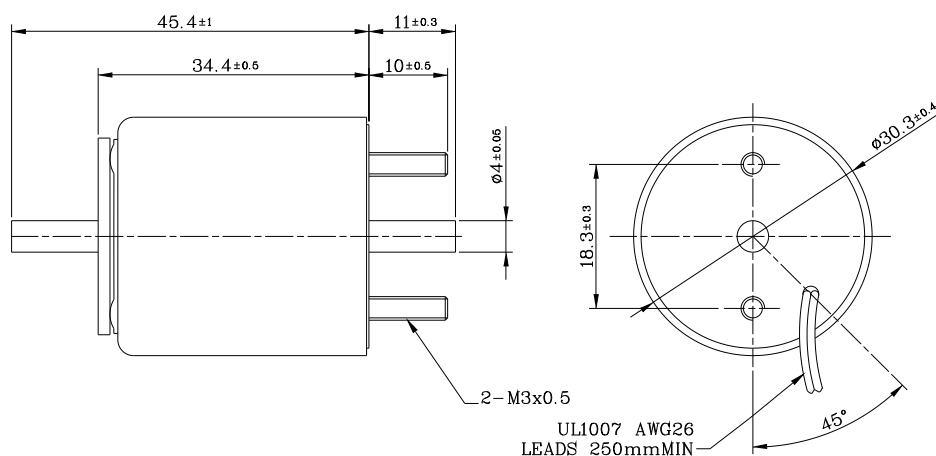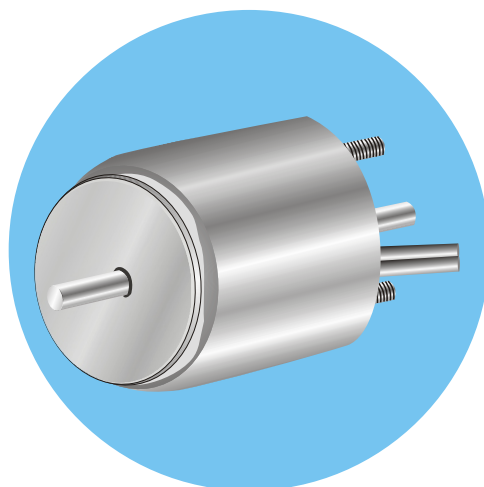

COIL DATA線圈資料

$\text{Duty Cycle (\%)} = \frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$ $\text{作動週期 (\%)} = \frac{\text{On時間}}{\text{ON時間} + \text{OFF時間}} \times 100\%$			Continuous(100%) 連續(100%)	Or less(50%) 間斷(50%)	Or less(25%) 間斷(25%)	Or less(10%) 間斷(10%)
MAX. "on" time in seconds 最大 ON 時間 (秒)			∞	100	36	9
Watts at 20°C 瓦特數 (w) (在20°C)			14	28	56	140
Ampere-turns at 20°C At值 (在20°C)			854	1210	1708	2705
Type No.	Resistance(20°C) $\Omega \pm 10\%$	No. Turns	Volts DC (電壓)			
型號	阻值(Ω) $\pm 10\%$	繞線圈數				
MTT-3034HLAA	2.77	407	6	8.5	12	19
	11.08	815	12	17	24	38
	44.31	1550	24	34	48	76
	177.23	3180	48	68	96	152

行程 / 吸引力
STROKE Vs FORCE

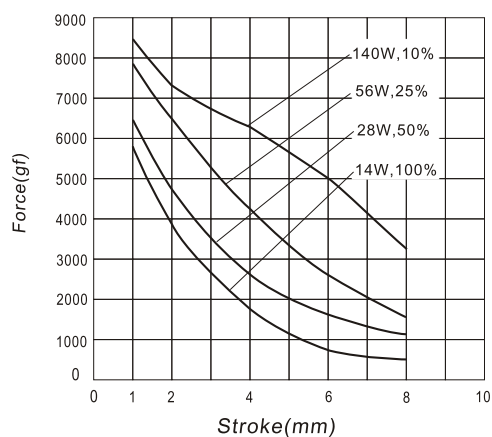

安-匝 / 吸引力
AMPERE-TURNS Vs FORCE

