


通電状態



$\text{Duty Cycle (\%)} = \frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$ $\text{作動週期 (\%)} = \frac{\text{On時間}}{\text{On時間} + \text{OFF時間}} \times 100\%$			Continuous(100%) 連續(100%)	Or less(50%) 間斷(50%)	Or less(25%) 間斷(25%)	Or less(10%) 間斷(10%)
MAX. "on" time in seconds 最大 ON 時間 (秒)			∞	100	36	8
Watts at 20°C 瓦特數 (w) (在20°C)			9	18	36	90
Ampere-turns at 20°C At值 (在20°C)			480	680	960	1520
Type No.	Resistance(20°C) Ω ±10%	No. Turns	Volts DC (電壓)			
型號	阻值(Ω)±10%	繞線圈數				
MTT-3418HLAA	4	320	6	8.5	12	19
	16	636	12	17	24	38
	64	1295	24	34	48	76
	256	2377	48	68	96	152

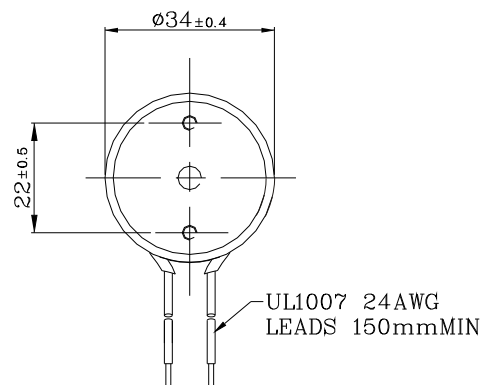