
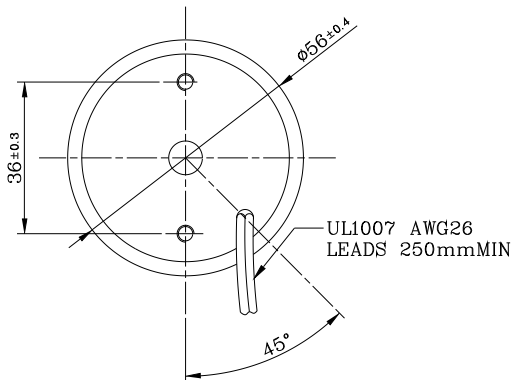
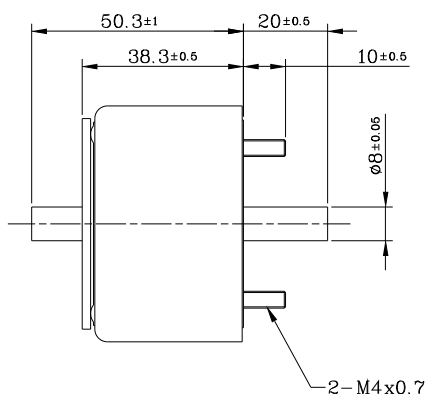


MTT-5638HL Push-Pull Solenoids

Plunger Weight
Total Weight

可動鐵心重量: 162g
總重量: 625g


Shown Energized
UNIT 單位:mm 通電狀態

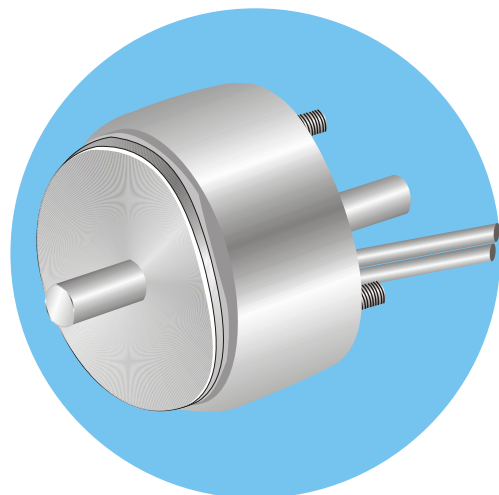

COIL DATA線圈資料

$\text{Duty Cycle (\%)} = \frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$ $\text{作動週期 (\%)} = \frac{\text{ON時間}}{\text{ON時間} + \text{OFF時間}} \times 100\%$			Continuous(100%) 連續(100%)	Or less(50%) 間斷(50%)	Or less(25%) 間斷(25%)	Or less(10%) 間斷(10%)
MAX. "on" time in seconds 最大 ON 時間 (秒)			∞	87	36	13
Watts at 20°C 瓦特數 (w) (在20°C)			29	58	116	290
Ampere-turns at 20°C At值 (在20°C)			861	1220	1722	2727
Type No.	Resistance(20°C) Ω ±10%	No. Turns	Volts DC (電壓)			
型號	阻值(Ω)±10%	繞線圈數				
MTT-5638HLAA	1.24	178	6	8.5	12	19
	4.97	380	12	17	24	38
	19.9	765	24	34	48	76
	79.5	1449	48	68	96	152

行程 / 吸引力
STROKE Vs FORCE

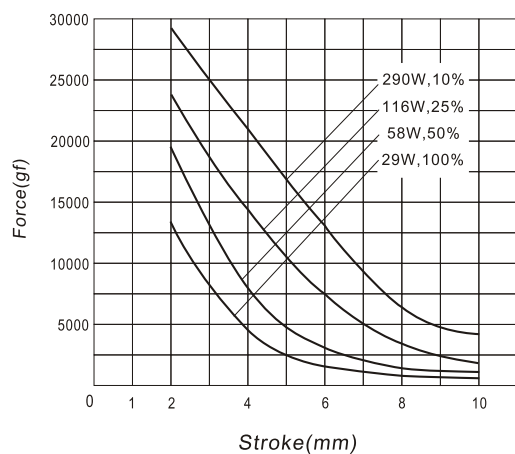

安-匝 / 吸引力
AMPERE-TURNS Vs FORCE

