

MTT-7598H Tubular Solenoids



Plunger Weight
Total Weight

可動鐵心重量: 528g
總重量: 2817g

Shown Energized
UNIT

通電狀態

單位:mm

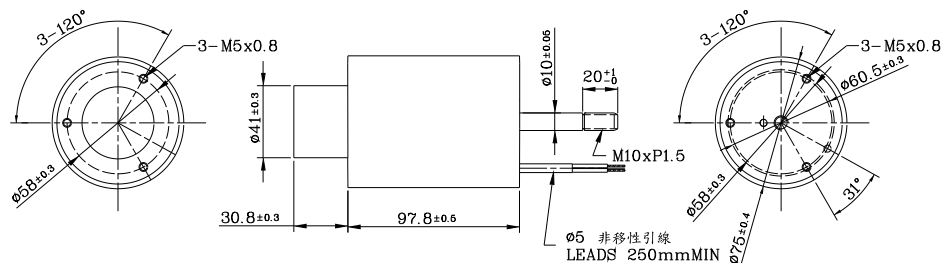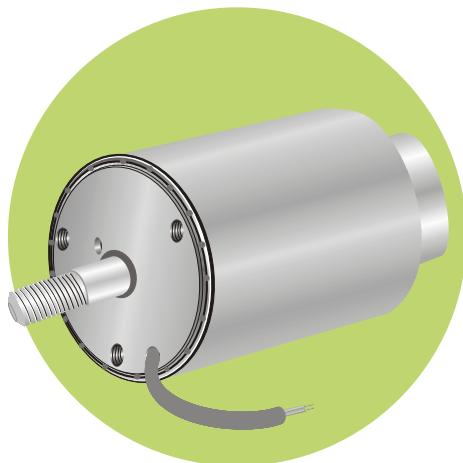


Stroke=25 $\pm$ 1.0mm

COIL DATA線圈資料

Duty Cycle (%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$ 作動週期 (%) = $\frac{\text{On時間}}{\text{ON時間} + \text{OFF時間}} \times 100\%$			Continuous(100%) 連續(100%)	Or less(50%) 間斷(50%)	Or less(25%) 間斷(25%)	Or less(10%) 間斷(10%)
MAX. "on" time in seconds 最大 ON 時間 (秒)			∞	72	43	20
Watts at 20°C 瓦特數 (w) (在20°C)			40.5	81	162	405
Ampere-turns at 20°C At值 (在20°C)			2191	3103	4382	6938
Type No.	Resistance(20°C) $\Omega \pm 10\%$	No. Turns	Volts DC (電壓)			
型號	阻值(Ω) $\pm 10\%$	繞線圈數				
MTT-7598HAA	0.89	325	6	8.5	12	19
	3.567	770	12	17	24	38
	14.22	1405	24	34	48	76
	56.89	3039	48	68	96	152

行程 / 吸引力
STROKE Vs FORCE

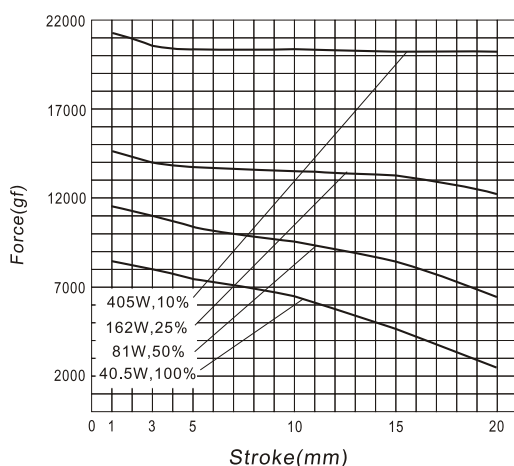

安-匝 / 吸引力
AMPERE-TURNS Vs FORCE

